


# DIGITUS CAT 5e U/UTP patch cord

**DK-1511-010**  
**EAN 4016032212102**

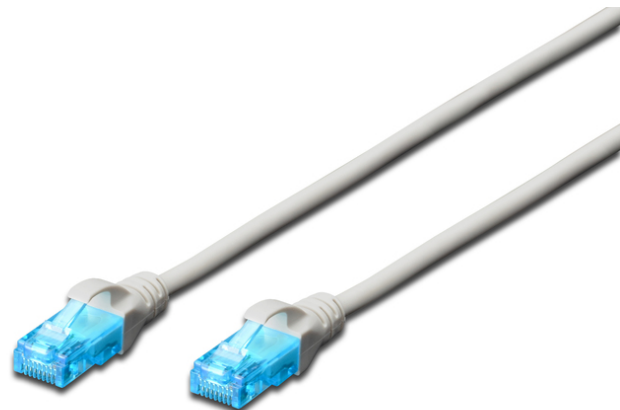

**CAT 5e U-UTP patch cord, Cu, PVC AWG 26/7, length 1 m, color grey**

The DIGITUS® Category 5e Class D patch cords are manufactured and tested to the ISO/IEC 11801 and DIN EN 50173 Category 5e specifications. They will guarantee the installed cabling system is compliant with the ISO & EN channel specification requirements and will provide optimum performance levels of DIGITUS® Category 5e cabling. The performance is tested up to 100 MHz inclusive performance characteristics such as near end cross talk ("NEXT"). DIGITUS® patch cords are designed and produced to fulfill the highest requirements of various application areas in full volume. Each cable is fitted with a molded boot which comes with kink protection and strain relief. Furthermore the boot is equipped with a latch protection that prevents the latching lever against breaking. You can easily identify the Category 5e, because of the transparent blue colored connector.

**Future-oriented standards and high-end quality for your network.**

- 2x RJ45 (8P8C) connectors
- Boots with kink protection, strain relief and latch protection
- Length marking on boot

- Conductor: Copper (Cu)
- Halogen free: no
- Cable type: U/UTP
- Pin assignment: 1:1
- Length: 1
- Colour outer sheath: Grey
- Category: 5E
- AWG-size: 26
- Anti-kink sleeve: Moulded-on
- Type of connector connection 1: RJ45 8(8)
- Type of connector connection 2: RJ45 8(8)
- Cable construction: 4x2
- Fire retardant version: no
- Colour anti-kink sleeve: Grey
- Locking lever: yes
- NVP value: 69
- Oil resistant (acc. EN 60811-404): no

**Package contents**

- One premium patch cord in Polybag

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	200	7.30	36.00	36.00	22.00	28,512.00
Packaging Unit Inside	10	0.37	8.20	25.00	30.00	6,150.00
Packaging Unit Single	1	0.04	1.60	11.50	21.00	386.40
Net single without Packaging	1	0.03	1.60	11.50	21.00	386.40